

havasis

ÇÖZÜMÜN
İLK ADI



Kurumsal & Ürünler

havasis.com.tr



Sipariş & Danışma Hattı

0549 449 3535

Teklif & Ürün Bilgi

info@havasis.com.tr

Kalibrasyon & Bakım Onarım Merkezi

servisdestek@kalibo.com.tr



vacuuMac
Katalog

ÜRÜN
KATALOGU

ATEX AND ACD VACUUM CLEANERS

VMFOX551-3DZ20-22

ATEX EXPLOSION-PROOF INDUSTRIAL VACUUM CLEANER



POWER
4 kW - 5,5 HP



APPLICATION
Combustible dusts




CAPACITY
100 Lt

FEATURES

- Suitable and safe for intensive work in Atex 22 zones
- ATEX-certified blower
- Third party certification of the inner chamber
- High-efficiency antistatic filtration with integrated manual cleaning system

HIGHLIGHTS

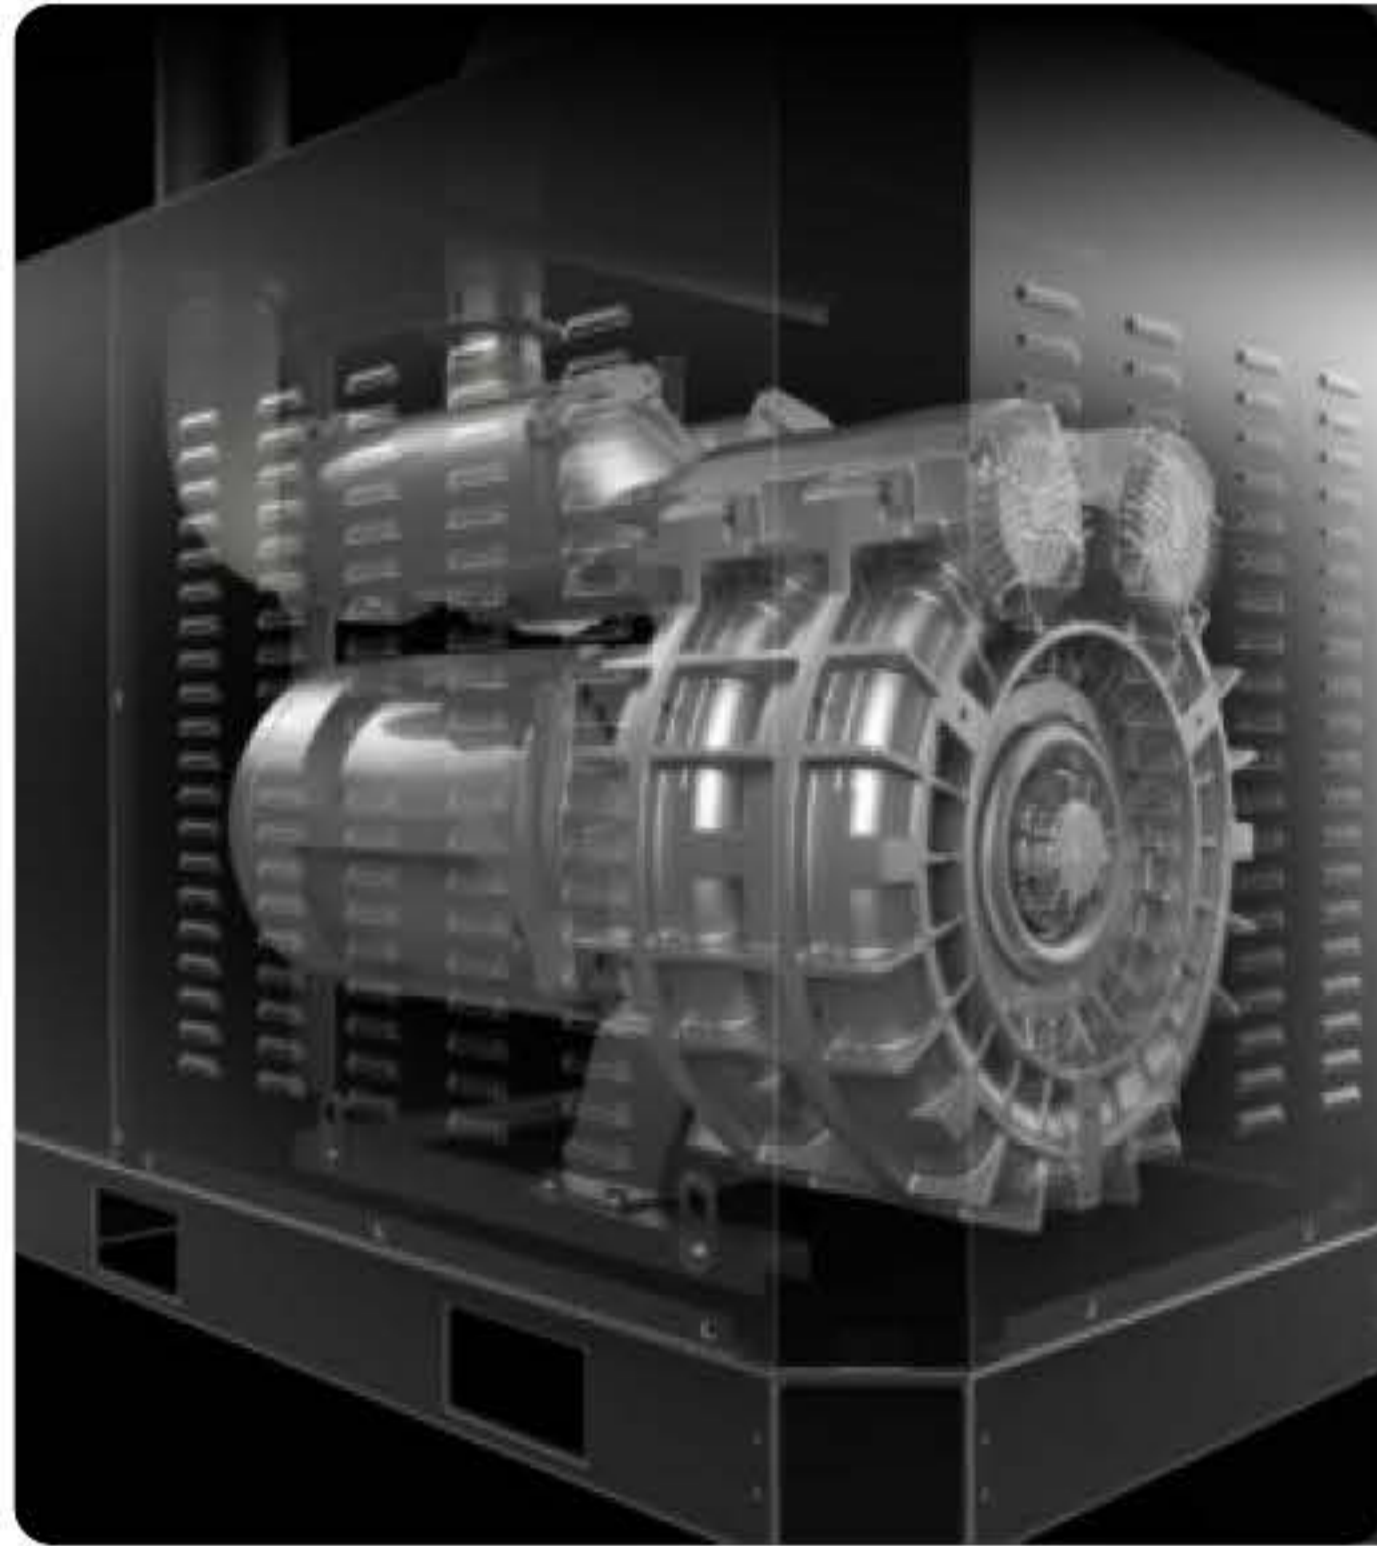

SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.



FILTER UNIT

The tangential inlet facilitates the cyclonic effect to deposit the collected material in the container. Filtration is ensured by a polyester star filter in class M (filtering efficiency 1 micron) with high filtering surface area, which guarantees air passage even with a dirty filter.



FILTER CLEANING SYSTEM

An ergonomic manual filter shaker allows the filter to be cleaned easily and quickly, removing dust and debris from the filter surface.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR		MACHINE		FILTRATION	
Typologies	Atex side channel blower	Atex marking	II 1/3D Ex htc IIIC T140°C Da/Dc	Primary filter type	Star
Power	4 kW - 5,5 HP	EX category	1/3D	Filter surface	24000 cm ²
Frequency	50/60 Hz	Operating temperature	-10/+40 C°	EN 60335-2-69 filtration class	M
Voltage	400 V	Suction inlet	80 Ø mm	Media	Antistatic polyester
Vacuum in continuous run	230 mBar	Collection system	AISI304 stainless steel container	Filter Cleaning System	Manual
Maximum air flow	450 m ³ /h	Capacity	100 Lt		
Insulation class	65 F IP	Dimensions	660 x 1200 mm		
Noise level	73 dB(A)	Height	1510 mm		
		Weight	157 Kg		
		Safety valve	Pressure relief valve		

FEATURES



THIRD PARTY ATEX CERTIFICATION



ANTISTATIC FILTRATION
Antistatic filtration to discharge static energy



4-PIN ATEX INDUSTRIAL PLUG



VACUUM GAUGE
Vacuum gauge for indication of filter clogged or in need of replacement



POWER SUPPLY CABLE




WHEEL WITH BRAKE
Non-marking wheel with integrated brake



WHEELS
Non-marking pivoting wheels



STEEL CONSTRUCTION
Rugged industrial coated steel construction

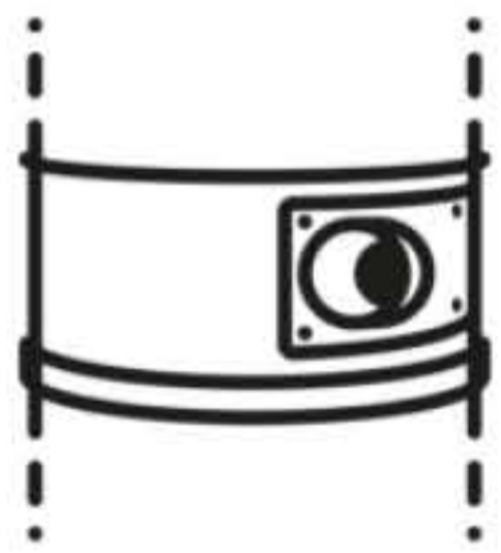

CYCLONIC EFFECT
Tangential inlet and cyclone installed



BX
Stainless steel bin AISI 304



PRV
Pressure relief valve installed



GRD
Grounding

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
28.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber



PTFE ANT
Antistatic PTFE filter (M class EN
60335-2-69)

STRUCTURE AND OPTIONS

60[✓]Hz

60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with
the vacuum



CONTAINER EMPTYING KIT
System for easy container emptying using
forklift lifting.



SPARK TRAP
Built to capture sparks produced during
welding, sanding, or polishing operations on
metal parts



GX
Stainless steel bin and chamber AISI 304

ACCESSORIES

**P12377**
ANTISTATIC KIT PRO Ø 50MM

Kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner

**P13642**
ANTISTATIC KIT PRO Ø 40MM

Kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner

**P12378**
ANTISTATIC STARTER KIT Ø 50MM

Basic kit containing antistatic accessories for application with 50 mm diameter ATEX vacuum cleaner

**P13641**
ANTISTATIC STARTER KIT Ø 40MM

Basic kit containing antistatic accessories for application with 40 mm diameter ATEX vacuum cleaner



ÇÖZÜMÜN İLK ADI

Mersinli 2823/1 No: 2/130 Konak / İzmir



Sipariş & Danışma Hattı

0549 449 3535

ONLINE ALIŞVERİŞ

pahaliyaalma.com

KURUMSAL İLETİŞİM

havasis.com.tr

Bursa Bölge
0530 060 1029

Ankara Bölge
0553 251 5537

İstanbul Bölge
0532 440 2191



Teklif & Ürün Bilgi
info@havasis.com.tr

Kalibrasyon Bakım ve Onarım Servisi
servisdestek@kalibo.com.tr